


## D-19CA

### מודול דיודות חיבור אנודה משותפת לבדיקת נורות בלוח חשמל

Diodes fulfil the most varied requirements in electrical and electronic control systems. Some examples: In lamp test circuits and collective fault indicators they are used to collect and decouple arriving signals. For inductive applications such as DC relays, solenoid valves, etc. They are used for arc suppression.

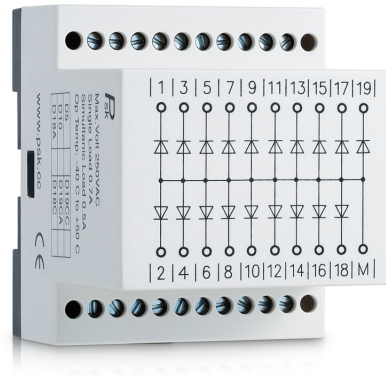


#### General specifications

• Diode type:	1N4007	1N5406
• Max operational voltage:	250VAC	250VAC
• Peak reverse voltage:	1200V	600V
• Forward voltage per diode:	0.8V	0.8V
• Individually loaded	0.7A	1.5A
• Simultaneously loaded:	0.3A	1 A
• Weight:	107 gram	120 gram

- Protection class open air: IP20
- Self-extinguishing plastic housing UL V0 acc IEC 529
- Terminal : acc IEC 60947-7-1, IEC 60998-1
- Terminal Capacity: 1x4mm<sup>2</sup> without multicore cable end  
 1x0.5 to 2.5mm<sup>2</sup> with/without multicore cable end
- Mounting position: on DIN-rail TS 35 according to EN 50022
- Mounting position: vertically
- Ambient temperature: -10°C to +55°C
- Storage temperature: -20°C to +70°C

#### Dimensions

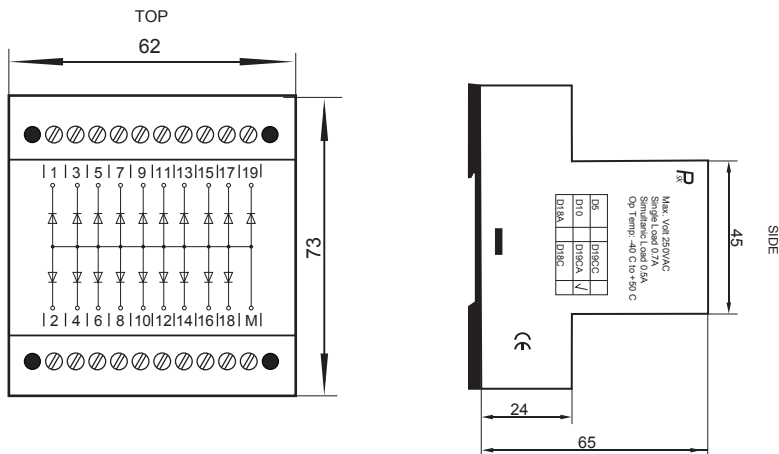

#### Ordering information

D19CA — M	M1	1N4007	0.7A
	M2	1N5406	1.5A