

ISO-556B-2

ממשק מבודד 2 התראות

- Each channel 1 Form C Relay
- LED Light Activates when Relay is Energized
- Screw pluggable Terminals for Field Wiring

Operating

The ISO 556B 2 - channel relay output board consists of 1 form C relay for efficient switching of loads by programmed controller or dry contact. The relay is energized by closing contact for the appropriate relay command on the terminal block connector. The LED is light when the relay is activated to avoid overloading and isolate your system; this board provides a screw terminal connection.

General specifications

- Protection class open air: IP20
- Protection class enclosed (accessible front): IP40 Self-extinguishing plastic housing UL V0 acc IEC 529
- Terminal: pluggable terminal blocks
 Acc IEC 60947-7-1, IEC 60998-1
- Terminal Capacity: 1x4mm² without multicore cable end
 1x0.5 to 2.5mm² with/without multicore cable end
- Mounting position: on DIN-rail TS 35 according to EN 50022
- Mounting position: vertically
- To connect the unit, use appropriate insulated 230VAC cord and appropriate circuit breaker.

Input circuit

- Supply voltage: 230VAC
- Rated consumption: 1.5VA
- Rated frequency for as voltage: 50 / 60 Hz
- Duty cycle: 100%
- Reset time: 20 ms
- Input: dry contacts / 24vac Z1-Z2

Display

- Red LED indicates of relay energized.

Output circuit

- Relay: 2 C/O
- Rated voltage: 240 VAC
- Switching capacity per channel 5A / 240V COS φ = 1
- Switching capacity DC : 3 A / 30 Vdc
- Max switching capacity: 6A
- Simultaneously switch current: (3A /240V) COS φ = 1
- Mechanical life: 1 x 10⁶ operations
- Electrical life: 1 x 10⁵ operations

Environmental conditions


- Permissible ambient temperature: -20°C....+55°C
- Storage temperature: -25°C....+70°C
- Transport temperature: -25°C....+70°C
- Relative humidity (acc. IEC 721-3-3 CLASS 3K3): 15% to 85%




Dimensions & weight

- Width: 35 mm
- Height: 73 mm
- Depth (excl. DIN-profile): 67mm
- Weight: 163gr

Connections

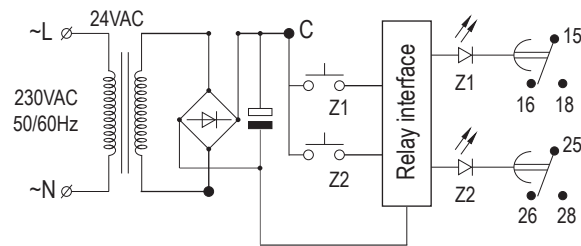

Dimensions

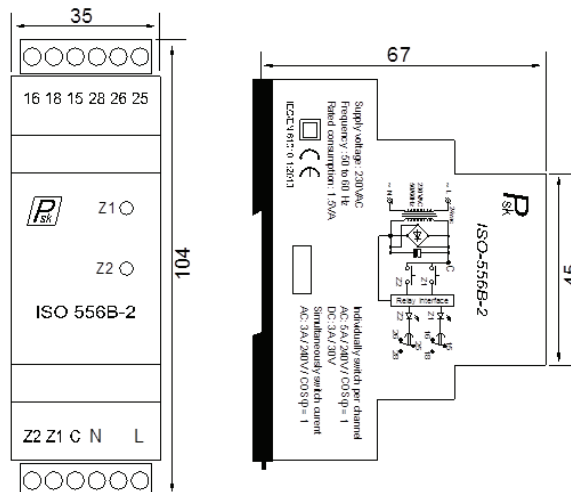

Ordering information

ISO-556B-2